
ACIB COMMUNICATION ISOLATION BOARD

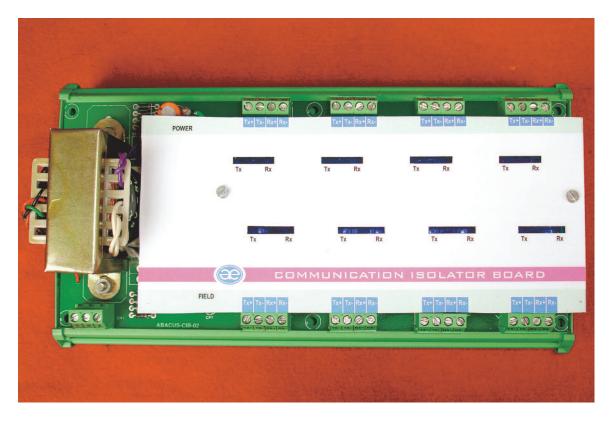

THE COMMUNICATION ISOLATOR BOARD IS HIGH SPEED RS 422/485 ISOLATOR . THE OPTICAL ISOLATION PROTECTS ONE SEGMENT OF YOUR NETWORK FROM PROBLEMS THAT ARISES ON THE OTHER. THE MODEL SUPPORTS FOR RS 422/RS 485- 4 WIRE/RS 485- 2 WIRE.(JUMPER LINK SELECTABLE).

*SPECIFICATIONS:

OPTICAL ISOLATION	1.5 KV
INTERFACE	RS 485 /RS422
SPEED	9600 BPS TO 38.4 KBPS
CONNECTORS	TERMINAL BLOCK.
INDICATIONS	SERIAL- TRANSMIT & RECEIVE (TX+, TX-, RX+, RX-)
POWER	230 /110 V AC
CHANNELS:	4 CHANNEL
SIZE :	232[L] X 108[W] X 60[H] MM.(DIN RAIL)